




ZODIAC INTERNATIONAL

DIVISION MARINE

ZODIAC G 470

P/N Z0389

Rev 4 – 16 Apr 07
TECHNICAL DATA SHEET

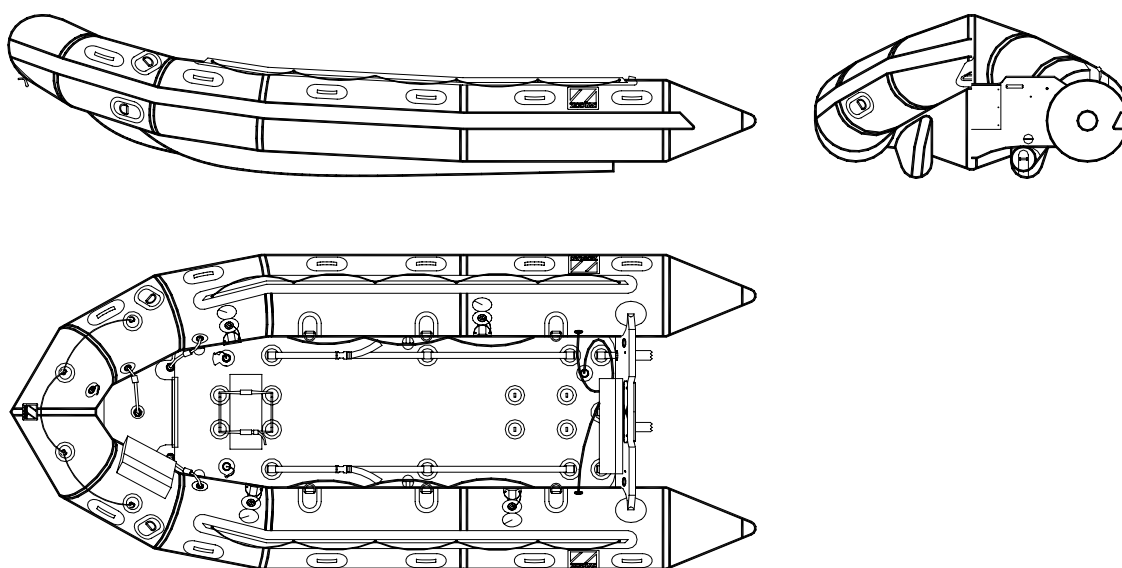

Light, fast and rapidly deployed

Designed and built for lightness and rapid deployment, the G range is entirely inflatable and uses a high-pressure performance (H2P) floor instead of solid floorboard sections. By using the optional compressed air cylinder, it is quickly inflated and launched in minutes, even by one person.

The hull shape is the same as the Futura Commando but the total boat is considerably lighter.

The G470 P/N Z0389 is available on special order only.

Important Note: Boats available in North America may have different specifications.

The overall appearances of the watercraft depicted in this document are trademarks of Zodiac

THIS MATERIAL CONTAINS PROPRIETARY DATA BELONGING TO ZODIAC INTERNATIONAL. UNAUTHORIZED DISCLOSURE, USE OR REPRODUCTION WILL RESULT IN LIABILITY. ZODIAC RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS OF THIS TECHNICAL DATA SHEET WITHOUT NOTICE.

Dimensions and weight + or - 3 % (5% on prototype)

page 1 / 4



ZODIAC INTERNATIONAL

DIVISION MARINE

G 470 BOAT DEFINITION

CAPACITY

. maximum number of persons (ISO6185) :	10	10
. maximum payload including engine and fuels (ISO6185) :	1 210 kg	2 667 lb
. floorboard usable area :	3.069 m ²	33.03 sq ft
. buoyancy tube volume :	1 850 l	65 cu ft

DIMENSIONS

. overall length :	4.70 m	15' 5"
. inside length :	3.30 m	10"
. overall width :	1.93 m	6' 4"
. inside width :	0.93 m	3' 1"
. weight without cylinder :	80 kg	176 lbs
. buoyancy tube diameter :	0.50 m	1'8"
. folded dimensions :		
	. with 15 liters diving cylinder ; tubes toward inside	1.40x0.70x0.50 4'7"x2'4"x1'8"
	. with 15 liters diving cylinder ; and tube flat, rolled	1.45x0.65x0.50 4'9"x2'2"x1'8"

SAFETY / INFLATION

. number of airtight compartments on main buoyancy tube :	5
. inflatable keel :	1
. lower tubes :	2
. inflatable high pressure floor :	1
. I / C valves :	4
. overpressure valves :	1+1 floor
. scuba air inflation points :	3

ENGINE POWER

. shaft length :	long	18"
. recommended power :	38 KW	50 HP
. maximum power allowed :	38 KW	50 HP
. maximum power allowed with 2 engines :	2 x 22 KW	2 x 30 HP
. maximum engine weight :	98 kg	216 lbs
. maximum weight with 2 engines :	2 x 75 kg	2 x 165 lbs

THIS MATERIAL CONTAINS PROPRIETARY DATA BELONGING TO ZODIAC INTERNATIONAL. UNAUTHORIZED DISCLOSURE, USE OR REPRODUCTION WILL RESULT IN LIABILITY. ZODIAC RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS OF THIS TECHNICAL DATA SHEET WITHOUT NOTICE.

Dimensions and weight + or - 3 % (5% on prototype)

page 2 / 4



ZODIAC INTERNATIONAL

DIVISION MARINE

STANDARD EQUIPMENT

FABRICS

- . buoyancy tubes : black , 1100 dtx, polyester , pvc
- . speed tubes : black , 1100 dtx, polyester , pvc
- . bottom : black , 1100 dtx, polyester , pvc
- . inflatable floor : black , h2p, pvc

TRANSOM BLACK

- . self-bailer, large flow : 2
- . engine mounting plate : 1
- . engine transom pad : 1
- . transom sheath for diving cylinder : 1

VALVES

Inflation valves

- . buoyancy tube (intercommunication / inflation valves) : 4
- . inflatable floor : 1

Overpressure valves

- . buoyancy tube : 1
- . inflatable floor : 1

Air inflation points (scuba diving cylinder)

- . buoyancy tube : 2
- . inflatable floor : 1
- . quick connect hoses from main tube to speed tubes : 2
- . quick connect hose from main tube to keel : 1

REINFORCEMENTS

- . rubbing strakes underneath keel, flat profile, black : 1
- . rubbing strakes underneath speed tubes, flat profile, black : 2
- . teardrop peripheral rubbing strakes, black : 1

THIS MATERIAL CONTAINS PROPRIETARY DATA BELONGING TO ZODIAC INTERNATIONAL. UNAUTHORIZED DISCLOSURE, USE OR REPRODUCTION WILL RESULT IN LIABILITY. ZODIAC RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS OF THIS TECHNICAL DATA SHEET WITHOUT NOTICE.

Dimensions and weight + or - 3 % (5% on prototype)

page 3 / 4



ZODIAC INTERNATIONAL

DIVISION MARINE

HANDLING

. lateral carrying handles , webbing with hose grip :	12
. bow carrying handle :	1
. exterior lifeline (peripheric) :	1
. floor attachment straps :	2
. interior large tie down D rings :	6

TOWING

. bow towing rings :	2
. transom lifting and towing points :	2
. bow lifting D rings :	2

OTHER EQUIPMENT

. high pressure pump :	1
. repair kit with pressure indicator :	1
. telescopic paddles in paddle pocket :	6
. carrying bag :	1
. fuel tank fastening strap :	1
. manifold for scuba dive cylinder w/ hoses to main tube & floor :	1

THIS MATERIAL CONTAINS PROPRIETARY DATA BELONGING TO ZODIAC INTERNATIONAL. UNAUTHORIZED DISCLOSURE, USE OR REPRODUCTION WILL RESULT IN LIABILITY. ZODIAC RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS OF THIS TECHNICAL DATA SHEET WITHOUT NOTICE.

Dimensions and weight + or - 3 % (5% on prototype)

page 4 / 4